


SetQuick

Art.: 5 29 20

ASSEMBLY AID

for the fixing of mullions in door and window frames

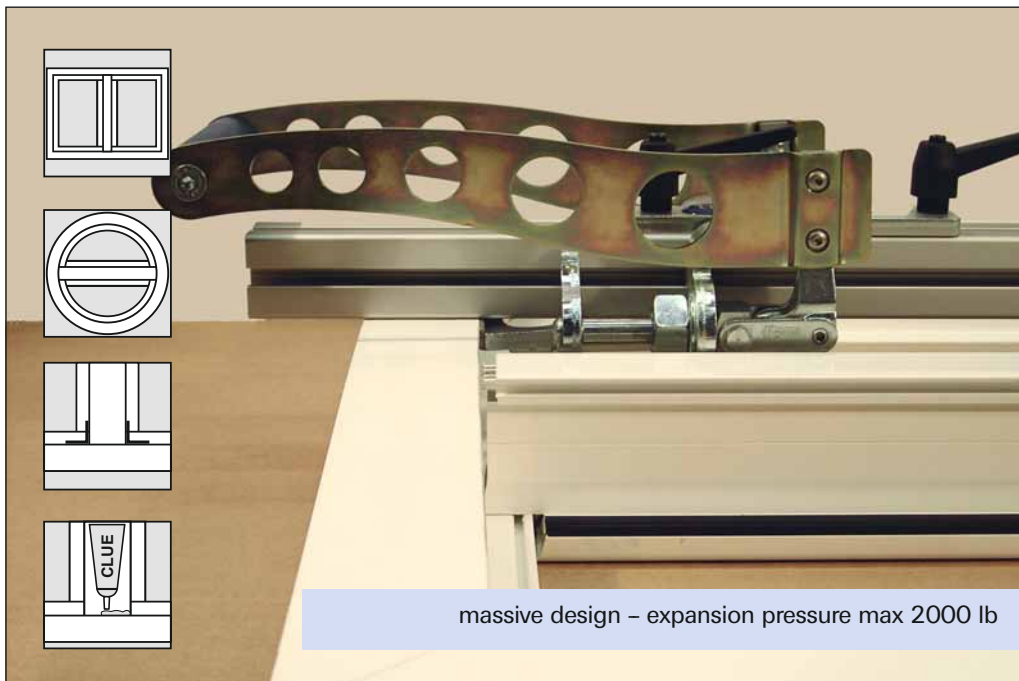

Application:

Facilitates the fixing of mullions:

- in very small window frames
- small window frames with steel reinforcement
- door frames
- round windows
- seal connecting piece
- use of beading angles or mechanical mullion connectors

Caution:

The expansion area can cause pinching if not done correctly. Using the device near welded corners or mullions can cause breakage and irreparable damage.

Do **not** exceed maximum expansion force. Guarantee is invalid for such cases.

Your advantages:

- The adhesive and sealing material are applied and the mullion can easily be set in the frame
- Ideal for beading angles which prevent the turning of the mullion
- The frame is not opened any further than necessary
- The lever remains in the expended position without being held
- Simple handling and flexible use
- Light, weights only 9 lb
- Expansion adjustable to max 32 mm
- Expansion width smoothly adjustable from 180–1,000 mm
- Expansion width optionally available up to 2,100 mm
- Pre-adjustment of the expansion width easily done by hand

Options:

- Art. 5 29 20 002 extension to 2,100 mm profile length

 – a trademark of Crasser Maschinen GmbH

Technical Data		
	• Expansion scale, adjustable in mm	max 32 mm
• Expansion pressure	max 10000 N (=2000 lb)	
• Force ratio	19 : 1	
• Window Frame, interior dimensions	180 mm to 1,000 mm	
• Window Frame, interior dimensions with extension	180 mm to 2,100 mm	
• Dimensions (L / W / H)	1,100 / 170 / 150 mm	
• Dimensions with extension (L / W / H)	2,200 / 170 / 150 mm	
• Weight	9 lb	
• Weight with extension	13 lb	

We reserve the right to modify the product in the interest of technical improvements

FAX ANSWER CARD

Company: _____
Street: _____
City/Country: _____
Name: _____
Telephone: _____
Telefax: _____
E-Mail: _____

Signature _____

Yes, we order:

(Enter number desired)

Yes, we would like an offer:

- ▶ pc. Art. 5 29 20 SetQuick 1,100 mm
- ▶ pc. Art. 5 29 20 002 Extension 2,100 mm