



clever  
machines  
for tricky  
windows



**Crasser Maschinen GmbH**  
Anger 33 · 95119 Naila · Germany  
Tel. ++49 (0)92 82/98 49 00  
Fax ++49 (0)92 82/98 49 01  
service@tricky.eu  
www.tricky.eu




# TrimQuick

Art.: 5 19 01

## MANUALLY OPERATED WELD FLASH TRIMMER

single cut, for angles of 25° to 180°,  
for both Mullion and bow joints.

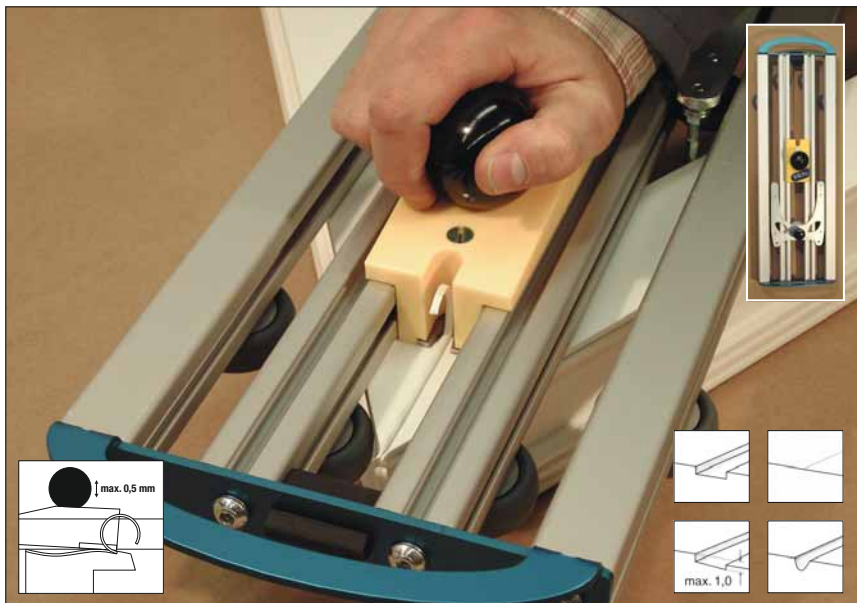

- Special blade for flush trims
- Additional sliding blade carriage
- Carriage stop for trimming mullions

### Application:

Suitable for trimming welding flash from the visible surfaces of joints between PVC profiles on window frames.

- For 90° angles
- For 25° to 180° angles
- For mullion joints
- Retouching improperly trimmed joints
- Retouching slightly uneven joints.

### Your Advantages:

- High-quality trim, completely comparable to machine precision cuts;
- No blade slippage, even with longer trims.
- Ideal for customized window frames
- Portable, for on-site construction work
- Quick and exact trimming of all varieties of flash
- Slightly uneven profile joints can be trimmed using bevelled blades
- Easy handling
- Easy and precise adjustment of the depth of the trim
- Light-weight, only 3.4 kg
- No cables or pneumatic tubing in the way
- Quick and easy exchange of blades.
- Tough design
- Freshly-heated flash can be trimmed with no further preparations required.
- Cold seams can be trimmed after the rough flash has been pre-cut

### The hand-held device consists of:

- a guide frame
- a set of guide rollers
- a slide clamp for easy, one-handed clamping
- a sliding carriage for the trimming blade

### Options:

- Standard trimming blade, (2,5x0,3 – 2,5x0,5 – 3,0x0,3 – 3,0x0,5 – 3,5x0,3 – 3,5x0,5)
- Special trimming blade, slanted, for slightly uneven joints (2,5x0,5 – 3,0x0,5 – 3,5x0,5 – 2,5x0,7 – 3,0x0,7 – 3,5x0,7)

**Weight:** Approx 3,4 kg

**Dimensions:** (LWH)  
660 x 225 x 75 mm

We reserve the right to modify the product in the interest of technical improvements.

**The end of unsightly trims**

– a trademark of Crasser Maschinen GmbH

## FAX ANSWER CARD

Company: \_\_\_\_\_  
Street: \_\_\_\_\_  
City/Country: \_\_\_\_\_  
Name: \_\_\_\_\_  
Telephone: \_\_\_\_\_  
Telefax: \_\_\_\_\_  
E-Mail: \_\_\_\_\_

Signature

Yes,  we order:

Yes,  we would like an offer:

(Enter number desired)

- ▶  pc. Art: 51901 TrimQuick including sliding carriage
- ▶  pc. Art: 51901-90 Carriage stops for mullion joints
- ▶  pc. Art: 51901-91S Special sliding carriage for swivelling blade
- ▶  pc. Art: 51901-0000 Special blade for flush trims (foiled, coloured)
- ▶  pc. Art: 51901-1111 Woodlike groove blade

depth of groove	Mark with a gross or fill in number for swivelling add with „S“	wide of groove		
		2.5 mm	3.0 mm	3.5 mm
	0.3 mm*			
	0.5 mm			
	0.7 mm**			

(\*) rigid - no swivelling (\*\*) swivelling (special sliding carriage required)

Fax-Nr. ++49 (0)92 82/98 49 01  
www.tricky.eu